

NA SERIES AUTOMATIC LEVELS




CAST CASE CONSTRUCTION

360 DEGREE CIRCLE

**PARALLEL PLATE MICROMETER
OPTION AVAILABLE (NA32 only)**

**LIFETIME
WARRANTY!**

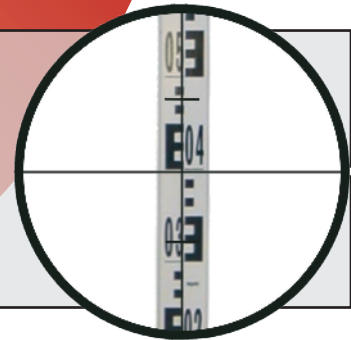

SPECIFICATIONS*

* SPECIFICATIONS ARE SUBJECT TO CHANGE AS WE STRIVE TO IMPROVE OUR PRODUCTS

TECHNICAL DATA	NA20	NA24	NA30	NA32 / plus PPM
Telescope	Errect	Errect	Errect	Errect
Magnification	20x	24x	30x	32x
Clear Objective Aperture	30mm	30mm	40mm	40mm
Field of View	1 Deg 30'	1 Deg 30'	1 Deg 30'	1 Deg 30'
Shortest Focusing Distance	0.5m	0.5m	0.5m	0.5m
Multiplication Factor	100	100	100	100
Additive Factor	0	0	0	0
Waterproof	Yes	Yes	Yes	Yes
COMPENSATOR				
Working Range	+/- 15'	+/- 15'	+/- 15'	+/- 15'
Setting Accuracy	+/- 0.5"	+/- 0.5"	+/- 0.4"	+/- 0.4"
Bubble Sensitivity	8' / 2mm	8' / 2mm	8' / 2mm	8' / 2mm
Circle Graduation	1 Degree	1 Degree	1 Degree	1 Degree
Standard Deviation for 1km Run	2.5mm	2.0mm	1.5mm	1.0mm / 0.2mm
Weight	1.3Kg	1.3Kg	1.3Kg	1.3 / 2.0Kg